

Autowave 2.0 Honda B605P Andaro Blue

FOR PROFESSIONAL USE ONLY

Definition and description

The repair system for Honda B605P Andaro Blue consists of different layers creating a special color effect, based on

- Autowave 2.0 Groundcoat color
- Autowave 2.0 Midcoat color
- Clearcoat

Color check by spray out samples

Groundcoat:

Apply groundcoat till completely covered and apply drop coat for optimal orientation. All coats should be completely dry before next coat is applied. Groundcoat is applied as standard Autowave 2.0.

Midcoat:

Correct color match needs to be determined by producing a number of color spray-out samples. The color depends on the number of coats applied of the midcoat. Distribute spray out panels according to the following matrix.

1. Apply the groundcoat till coverage followed by a drop coat.
2. Apply 2, 3 and 4 layers of the midcoat to the panels, from left to right.

Groundcoat	2 layers Midcoat	3 layers Midcoat	4 layers Midcoat

3. Allow for a 10-15 minutes flash-off time at 25°C prior to clearcoat application.
4. Apply two single layers of clearcoat.

The operator can determine the right color match by use of these color samples.

- Number each panel, indicating the number of groundcoat and midcoat layers on the panel.

DO NOT SPRAY EACH PANEL SEPARATELY.

- The application will vary depending on temperature, humidity and applicator and therefore could have an influence on the number of midcoat layers.

Autowave 2.0 Honda B605P Andaro Blue

FOR PROFESSIONAL USE ONLY

Suitable substrates

All Existing OEM finishes.
 All current Sikkens preparatory products with the exception of Washprimers.

Surface preparation



Primer (Sanding) area

Final sanding step P500

- Initial sanding steps may be executed with a coarser sanding grit; P360 - P400
- Respect a maximum 100 sanding grit step difference or less throughout the sanding procedure.
- For detailed surface preparation see TDS S8.06.02



Basecoat blend area

Final sanding step P1000

- Initial sanding steps may be executed with a coarser sanding grit P600 - P800
- Respect a maximum 200 sanding grit step difference or less throughout the sanding procedure.
- For detailed surface preparation see TDS S8.06.02
- Do NOT use Autowave MM666/MM600 as pre-coat; it will change the depth of the OE color.
- Clear Midcoat can be used as a pre coat; it has to be dried completely before application of Groundcoat color.




Surface cleaning: remove contamination using an appropriate surface cleaner.

Autowave 2.0 Honda B605P Andaro Blue

FOR PROFESSIONAL USE ONLY

Groundcoat application



100 parts by volume of Groundcoat
 10-20 parts by volume Activator WB




Use Sikkens measuring stick

14 Blue




Spray gun set-up:
 1.3 –1.5 mm

Application pressure:
 1.8 bar at the air inlet
 HVLP max 0.6-0.7 bar at the air cap



Apply groundcoat until completely covered, flash-off after each coat and apply a drop coat.



Flash off by increasing airflow until completely dry after each coat.
 Drop coat has to be flashed until completely dry before midcoat application.

Autowave 2.0 Honda B605P Andaro Blue

FOR PROFESSIONAL USE ONLY

Midcoat application




100 grams of Midcoat
 4 grams of Autowave MM700
 +
 20-30 grams of Activator WB




Spray gun set-up:
 1.3 –1.5 mm

Application pressure:
 1.8 bar at the air inlet
 HVLP max 0.6-0.7 bar at the air cap




Apply the number of midcoat layers until the desired color is achieved, flash-off after each coat till completely matt.



Flash off by increasing airflow until completely dry after each coat and before Clearcoat application.

Repair Process

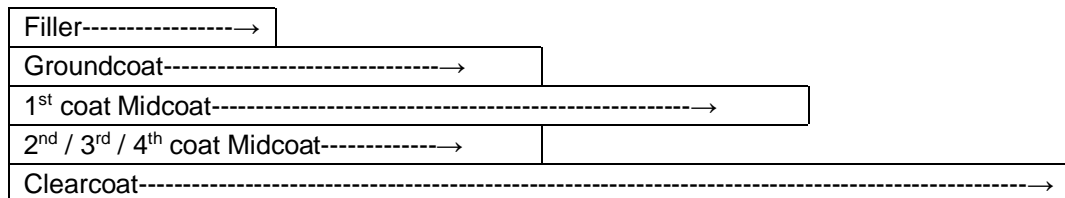

Autowave 2.0 Honda B605P Andaro Blue

FOR PROFESSIONAL USE ONLY

Clearcoat




See Clearcoat T.D.S.



Use suitable respiratory protection
Akzo Nobel Car Refinishes recommends the use of a fresh air supply respirator.

Notes



- Ensure that each coat is thoroughly flashed-off.
- Application of a Tri-Stage color is the same as a Three Stage Pearl effect color. For further information please refer to Technical Bulletin Autowave 2.0 Three Stage Pearl application process.

Akzo Nobel Car Refinish bv...

Address: Rijksweg 31, PO Box 3, 2170 BA Sassenheim.

Tel: +31(0)71308-6944

FOR PROFESSIONAL USE ONLY

IMPORTANT NOTE The information in this data sheet is not intended to be exhaustive and is based on the present state of our knowledge and on current laws: any person using the product for any purpose other than that specifically recommended in the technical data sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at his own risk. It is always the responsibility of the user to take all necessary steps to fulfill the demands set out in the local rules and legislation. Always read the Material Data Sheet and the Technical Data Sheet for this product if available. All advice we give or any statement made about the product by us (whether in this data sheet or otherwise) is correct to the best of our knowledge but we have no control over the quality or the condition of the substrate or the many factors affecting the use and application of the product. Therefore, unless we specifically agree in writing otherwise, we do not accept any liability whatsoever for the performance of the product or for any loss or damage arising out of the use of the product. All products supplied and technical advices given are subject to our standard terms and conditions of sale. You should request a copy of this document and review it carefully. The information contained in this data sheet is subject to modification from time to time in the light of experience and our policy of continuous development. It is the user's responsibility to verify that this data sheet is current prior to using the product.

Brand names mentioned in this data sheet are trademarks of or are licensed to Akzo Nobel.

Head Office

Akzo Nobel Car Refinishes B.V., PO Box 3 2170 BA Sassenheim, The Netherlands. www.sikkenscr.com